

LANDSCAPE ACCENT SPOTLIGHT

6W | 24V | 2700K

ZICO[®]
LIGHTING
WORLDWIDE

A compact architectural LED floodlight delivering up to 315lm at CRI90 with precision beam angles from 12° to 60° for versatile outdoor lighting. Featuring IP66 protection, IK08 impact resistance, and safe, efficient DC 24V operation, this spotlight offers reliable performance with built-in DMX512 protocol for professional-grade creative control.

Item number: ZL-SP/6W2724V12O | ZL-SP/6W2724V30O | ZL-SP/6W2724V60O
(option with honeycomb: ZL-SP/6W2724V12OH | ZL-SP/6W2724V30OH | ZL-SP/6W2724V60OH)

LUMINAIRE

Style	Spotlight
Dimmable	Yes, on DMX
Beam Angle	12° 30° 60°
Lumen	315lm 315lm 290lm
CCT	2700K
CRI	90
Finish	Olive Green
NET Weight	0.24kg
LED Wattage	6w
Voltage	DC24V
Control	DMX512 or ON/OFF switch
Wiring	Power/DMX input cable OPEN END 1,000 mm

OPERATING ENVIRONMENT

Operating Temperature	-20°C to +50°C
IP rating	IP66
Impact resistance	IK08
Lifetime	50,000 hours Ta=25 °C
Warranty	3 years



OPTIONAL ACCESSORIES

Spike (ZL-SP/SPO)
Leader Cable with Female Connector (ZL-SP/CABFC)

EAN-13 CODES

ZL-SP/6W2724V12O	5060537724034
ZL-SP/6W2724V30O	5060537724041
ZL-SP/6W2724V60O	5060537724058
ZL-SP/6W2724V12OH	5060537724089
ZL-SP/6W2724V30OH	5060537724096
ZL-SP/6W2724V60OH	5060537724102
ZL-SP/SPO	5060537724065
ZL-SP/CABFC	5060537724072

**Shown with optional spike.*

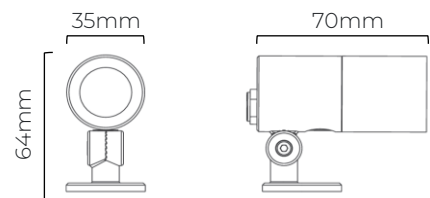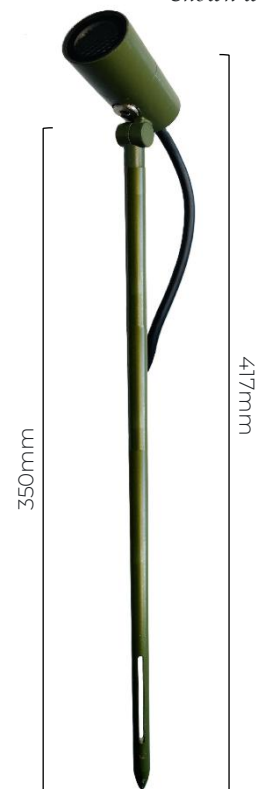

*Light source of energy efficiency classification F.
The light source is not replaceable.*



Our products as well as the technologies behind them are subject to continuous improvements. All specification is subject to change without notice. Please refer to our website for the most up to date information.

www.zico.lighting | +44 (0)20 7223 3087 | admin@zico.lighting

ZICO LIGHTING 3rd Floor, 207 Regent Street, London W1B 3HH United Kingdom