

# ZICO®

LIGHTING  
WORLDWIDE



YOUR PREMIUM LIGHTING SOLUTIONS PARTNER  
2022 COLLECTION (SEPTEMBER EDITION)





ANNABEL'S PRIVATE MEMBER'S CLUB, LONDON



## OUR STORY

---

Zico Lighting was founded in 2011 by lighting specialist James Miller when he realised the light bulbs he was distributing weren't meeting the stringent quality standards of his high end hospitality clients. His solution? To set up his own company manufacturing superior quality LED filament light bulbs to meet the specific needs of the hospitality industry. And so Zico Lighting was born.

Since then, we have grown to become the market-leading lighting hospitality brand, supplying lighting solutions to the world's finest hotels, restaurants, historic buildings and private residences.

We are proud to have long-standing, established relationships with some of the industry's top interior designers, lighting designers and architects, delivering outstanding lighting solutions for their exquisite interiors.

As a privately-owned company with proven knowledge and expertise in our niche, we offer the very best lighting solutions for some of the world's most discerning clients. Quality, service and unparalleled industry expertise are our hallmarks.

## GLASS SHAPE



GLS CANDLE FRENCH CANDLE FLAME TIP GOLFBALL SQUIRREL CAGE



GLOBE RADIO TUBE PIGMY GU10 G4 G9

## FINISHES



CLEAR FROSTED PORCELAIN AMBER SILVER MIRRORED GOLD MIRRORED

## SOCKETS



E14 E27 B15 B22 G4 G9





ANNABEL'S PRIVATE MEMBER'S CLUB, LONDON







# PREMIUM FEATURES



## ULTRA DIMMABLE: LEADING AND TRAILING EDGE

Zico Lighting LED lamps use highly sophisticated components. The result is an incredibly smooth dimming curve that works flawlessly across virtually all global mains dimming and control systems, delivering dimming to zero as a traditional halogen lamp.



## FLICKER FREE

Through firm commitment to quality of materials and craftsmanship, Zico Lighting lamps are able to deliver consistently flicker free lighting. This technology is perfect for film and theatres, wellness centres and spas, gaming organisations, security camera operation, animal welfare and general health and wellness lighting for home and office.



## HIGH CRI

With Colour Rendering Index (CRI) of up to 95 Zico Lighting lamps closely mimic natural daylight, creating a restful ambience, while perfectly showcasing depth and vividity of colours within the interior.



## 3 YEAR WARRANTY

By using highly specified components and latest technologies in every Zico Lighting lamp we create a premium product you can rely on. For additional peace of mind, all of our lamps come with a 3-year like for like replacement warranty.



## DIM TO WARM RANGE

*A range of decorative, ultra-dimmable LED filament lamps in four shapes, fitted with top, industry-rated flicker-free technology and 3 years warranty. Zico Lighting Dim-to-Warm lamps display an attractive Porcelain finish.*

### CANDLE C35 1800 – 3200K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 90         |
| GLASS FINISH       | PORCELAIN  |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 100 X 35MM |



| MODEL           | LAMP SHAPE | LUMEN | WATTS | SOCKET | ENERGY |
|-----------------|------------|-------|-------|--------|--------|
| ZIK008/4WDWE14P | CANDLE C35 | 250   | 4     | E14    |        |

We are delighted to be able to offer GU10 dim-to-warm spotlights in addition to our filament lamp range. Full details are available in the GU10 section of this brochure.



### SPHERES 1800 – 3200K

DIMMABLE: LEADING & TRAILING EDGE

|                    |                                      |
|--------------------|--------------------------------------|
| CRI                | 90                                   |
| GLASS FINISH       | PORCELAIN                            |
| LIFETIME HRS       | 30,000                               |
| ON/ OFF CYCLES     | 100,000                              |
| START TIME         | < 0.2 SEC                            |
| VOLTAGE            | 220V-240V                            |
| HZ                 | 50/60HZ                              |
| IN RUSH PROTECTION | 3,000V                               |
| BEAM ANGLE         | 360°                                 |
| DIMENSIONS         | 140 X 95MM / 110 X 60MM / 75 X 45 MM |



|     | MODEL            | LAMP SHAPE   | LUMEN | WATTS | SOCKET | ENERGY |
|-----|------------------|--------------|-------|-------|--------|--------|
| NEW | ZIKD048/6WDWE27P | GLOBE G95    | 430   | 6     | E27    |        |
|     | ZIK031/6WDWE27P  | GLS A60      | 430   | 6     | E27    |        |
| NEW | ZIK017/4WDWE27P  | GOLFBALL G45 | 250   | 4     | E27    |        |







## HELIX RANGE

*A collection of ultra-dimmable LED filament lamps, complete with the top of the range Helix soft filaments and amber glass finish for a truly stunning decorative feature. These lamps come in five shapes and are fitted with best quality, industry-rated flicker-free technology for flawless dimming.*

### CANDLE C35 2000K


DIMMABLE: LEADING & TRAILING EDGE

|                    |           |
|--------------------|-----------|
| CRI                | 95        |
| GLASS FINISH       | AMBER     |
| LIFETIME HRS       | 30,000    |
| ON/ OFF CYCLES     | 100,000   |
| START TIME         | < 0.2 SEC |
| VOLTAGE            | 220V-240V |
| HZ                 | 50/60HZ   |
| IN RUSH PROTECTION | 3,000V    |
| BEAM ANGLE         | 360°      |
| DIMENSIONS         | 100 X35MM |



Aquila  
LUMINOUS

|     | MODEL            | LAMP SHAPE | LUMEN | WATTS | SOCKET | ENERGY |
|-----|------------------|------------|-------|-------|--------|--------|
| NEW | ZIK008H/2W22E14A | CANDLE C35 | 120   | 2     | E14    |        |

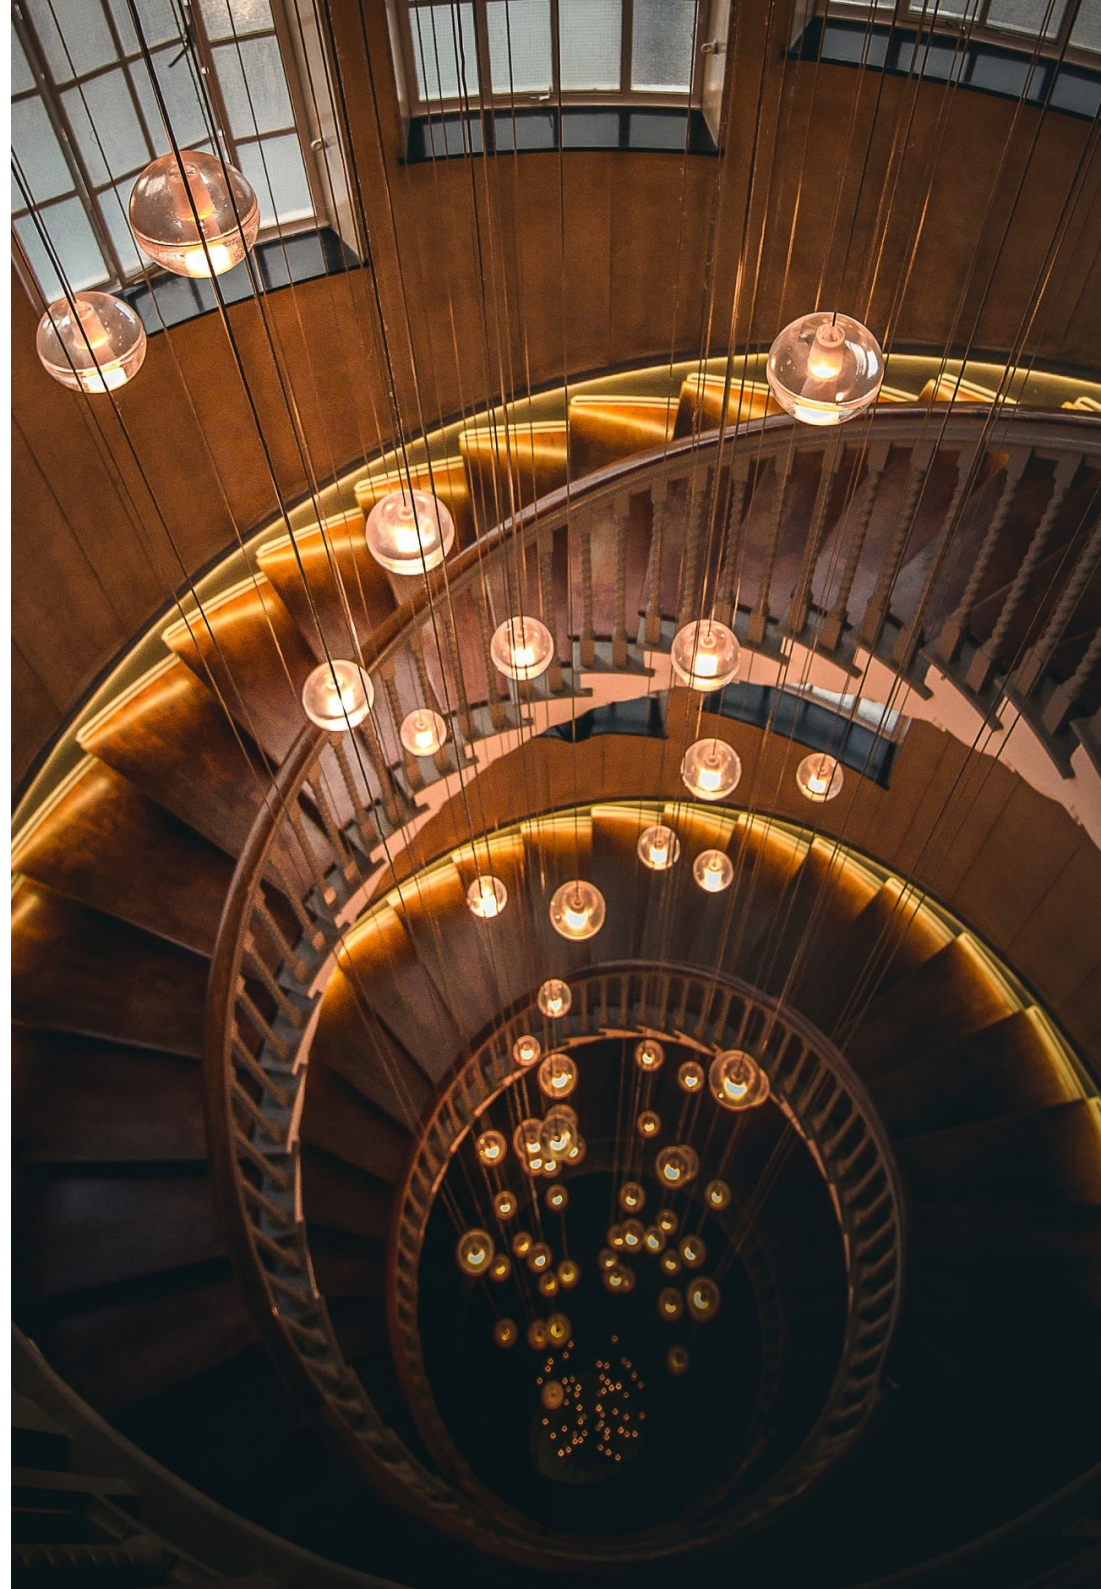





## SPHERES 2000K

DIMMABLE: LEADING & TRAILING EDGE

|                    |                                      |
|--------------------|--------------------------------------|
| CRI                | 95                                   |
| GLASS FINISH       | AMBER                                |
| LIFETIME HRS       | 30,000                               |
| ON/ OFF CYCLES     | 100,000                              |
| START TIME         | < 0.2 SEC                            |
| VOLTAGE            | 220V-240V                            |
| HZ                 | 50/60HZ                              |
| IN RUSH PROTECTION | 3,000V                               |
| BEAM ANGLE         | 360°                                 |
| DIMENSIONS         | 140 X 95MM / 110 X 60MM / 75 X 45 MM |



Aquila

|     | MODEL             | LAMP SHAPE   | LUMEN | WATTS | SOCKET | ENERGY |
|-----|-------------------|--------------|-------|-------|--------|--------|
| NEW | ZIKD048H/4W22E27A | GLOBE G95    | 160   | 4     | E27    | G A G  |
| NEW | ZIK031H/4W22E27A  | GLS A60      | 160   | 4     | E27    | G A G  |
| NEW | ZIK017H/2W22E27A  | GOLFBALL G45 | 120   | 2     | E27    | G A G  |

## SQUIRREL CAGE ST64 2000K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 95         |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 140 X 64MM |



Aquila

|     | MODEL             | LAMP SHAPE    | LUMEN | WATTS | SOCKET | ENERGY |
|-----|-------------------|---------------|-------|-------|--------|--------|
| NEW | ZIKD044H/4W22E27A | SQUIRREL CAGE | 160   | 4     | E27    | G A G  |





## CANDLE C35

*Decorative, ultra-dimmable LED filament lamp in a Candle shape, fitted with top, industry-rated flicker-free technology and 3 years warranty. This lamp comes in a choice of 3 temperatures as well as a dim to warm option.*

### CANDLE C35 2000K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 95         |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 100 X 35MM |



| MODEL           | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|-----------------|--------------|-------|-------|--------|--------|
| ZIK008/4W22B15A | AMBER        | 250   | 4     | B15    |        |
| ZIK008/4W22B22A | AMBER        | 250   | 4     | B22    |        |
| ZIK008/4W22E14A | AMBER        | 250   | 4     | E14    |        |
| ZIK008/4W22E27A | AMBER        | 250   | 4     | E27    |        |



### CANDLE C35 2200K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 95         |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 100 X 35MM |



| MODEL            | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|------------------|--------------|-------|-------|--------|--------|
| ZIK008/4W22B15C  | CLEAR        | 280   | 4     | B15    |        |
| ZIK008/4W22B22C  | CLEAR        | 280   | 4     | B22    |        |
| ZIK008/4W22E14C  | CLEAR        | 280   | 4     | E14    |        |
| ZIK008/4W22E27C  | CLEAR        | 280   | 4     | E27    |        |
| ZIK008S/6W22E14C | CLEAR        | 370   | 6     | E14    |        |
| ZIK008/4W22E14F  | FROSTED      | 250   | 4     | E14    |        |





FOUR SEASONS ASTIR PALACE, ATHENS



## CANDLE C35 2700K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 90         |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 100 X 35MM |



Aquila  
BY ZICO LIGHTING

NEW

| MODEL            | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|------------------|--------------|-------|-------|--------|--------|
| ZIK008/4W27B15C  | CLEAR        | 400   | 4     | B15    | F A+ G |
| ZIK008/4W27B22C  | CLEAR        | 400   | 4     | B22    | F A+ G |
| ZIK008/4W27E14C  | CLEAR        | 400   | 4     | E14    | F A+ G |
| ZIK008/4W27E27C  | CLEAR        | 400   | 4     | E27    | F A+ G |
| ZIK008S/6W27B15C | CLEAR        | 490   | 6     | B15    | G A+ G |
| ZIK008S/6W27B22C | CLEAR        | 490   | 6     | B22    | G A+ G |
| ZIK008S/6W27E14C | CLEAR        | 490   | 6     | E14    | G A+ G |
| ZIK008S/6W27E27C | CLEAR        | 490   | 6     | E27    | G A+ G |
| ZIK008/2W27E14F  | FROSTED      | 170   | 2     | E14    | F A+ G |
| ZIK008/4W27E14F  | FROSTED      | 360   | 4     | E14    | G A+ G |
| ZIK008/4W27E27F  | FROSTED      | 360   | 4     | E27    | G A+ G |
| ZIK008/4W27E14P  | PORCELAIN    | 300   | 4     | E14    | G A+ G |



## FRENCH CANDLE C22

CLARIDGE'S

### FRENCH CANDLE C22 2200K

DIMMABLE: LEADING & TRAILING EDGE

|                    |           |
|--------------------|-----------|
| CRI                | 95        |
| LIFETIME HRS       | 30,000    |
| ON/ OFF CYCLES     | 100,000   |
| START TIME         | < 0.2 SEC |
| VOLTAGE            | 220V-240V |
| HZ                 | 50/60HZ   |
| IN RUSH PROTECTION | 3,000V    |
| BEAM ANGLE         | 360°      |
| DIMENSIONS         | 86 X 22MM |



Aquila

| MODEL           | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|-----------------|--------------|-------|-------|--------|--------|
| ZIK075/2W22E10C | CLEAR        | 150   | 2     | E10    |        |
| ZIK075/2W22E14C | CLEAR        | 150   | 2     | E14    |        |

### FRENCH CANDLE C22 2700K

DIMMABLE: LEADING & TRAILING EDGE

|                    |           |
|--------------------|-----------|
| CRI                | 90        |
| LIFETIME HRS       | 30,000    |
| ON/ OFF CYCLES     | 100,000   |
| START TIME         | < 0.2 SEC |
| VOLTAGE            | 220V-240V |
| HZ                 | 50/60HZ   |
| IN RUSH PROTECTION | 3,000V    |
| BEAM ANGLE         | 360°      |
| DIMENSIONS         | 86 X 22MM |



Aquila

This petite candle shape is particularly popular for use in antique chandeliers requiring smaller base cap options.

| MODEL           | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|-----------------|--------------|-------|-------|--------|--------|
| ZIK075/2W27E10C | CLEAR        | 180   | 2     | E10    |        |
| ZIK075/2W27E14C | CLEAR        | 180   | 2     | E14    |        |



## FLAME TIP CANDLE C35

*Decorative, ultra-dimmable LED filament lamp in a Flame Tip Candle shape, fitted with top, industry-rated flicker-free technology and 3 years warranty. This lamp comes in a choice of 2 temperatures.*

### FLAME TIP CANDLE C35 2200K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 95         |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 120 X 35MM |



| MODEL             | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|-------------------|--------------|-------|-------|--------|--------|
| ZIK008FT/4W22E14C | CLEAR        | 280   | 4     | E14    |        |
| ZIK008FT/6W22E14C | CLEAR        | 420   | 6     | E14    |        |

The artistic feel of the Flame Tip Candle shape is particularly popular for use in chandeliers to create an illusion of real candles.

### FLAME TIP CANDLE C35 2700K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 90         |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 120 X 35MM |



| MODEL             | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|-------------------|--------------|-------|-------|--------|--------|
| ZIK008FT/4W27E14C | CLEAR        | 400   | 4     | E14    |        |
| ZIK008FT/6W27E14C | CLEAR        | 490   | 6     | E14    |        |



ST MARTIN OF TOURS CHURCH, EPSOM





THE NED HOTEL

## GOLFBALL G45

*Decorative, ultra-dimmable LED filament lamp in a Golfball shape, fitted with top, industry-rated flicker-free technology and 3 years warranty. This lamp comes in a choice of 6 glass finishes, 3 temperatures as well as a dim to warm option.*

### GOLFBALL G45 2000K

DIMMABLE: LEADING & TRAILING EDGE

|                    |           |
|--------------------|-----------|
| CRI                | 95        |
| LIFETIME HRS       | 30,000    |
| ON/ OFF CYCLES     | 100,000   |
| START TIME         | < 0.2 SEC |
| VOLTAGE            | 220V-240V |
| HZ                 | 50/60HZ   |
| IN RUSH PROTECTION | 3,000V    |
| BEAM ANGLE         | 360°      |
| DIMENSIONS         | 75 X45MM  |



Aquila  
LUMENS CENTER

| MODEL           | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|-----------------|--------------|-------|-------|--------|--------|
| ZIK017/4W22B22A | AMBER        | 230   | 4     | B22    |        |
| ZIK017/4W22E14A | AMBER        | 230   | 4     | E14    |        |
| ZIK017/4W22E27A | AMBER        | 230   | 4     | E27    |        |





## GOLFBALL G45 2200K

DIMMABLE: LEADING & TRAILING EDGE

|                    |           |
|--------------------|-----------|
| CRI                | 95        |
| LIFETIME HRS       | 30,000    |
| ON/ OFF CYCLES     | 100,000   |
| START TIME         | < 0.2 SEC |
| VOLTAGE            | 220V-240V |
| HZ                 | 50/60HZ   |
| IN RUSH PROTECTION | 3,000V    |
| BEAM ANGLE         | 360°      |
| DIMENSIONS         | 75 X45MM  |



| MODEL           | GLASS FINISH   | LUMEN | WATTS | SOCKET | ENERGY |
|-----------------|----------------|-------|-------|--------|--------|
| ZIK017/4W22E14C | CLEAR          | 280   | 4     | E14    |        |
| ZIK017/4W22E27C | CLEAR          | 280   | 4     | E27    |        |
| ZIK017/4W22B22C | CLEAR          | 280   | 4     | B22    |        |
| ZIK017/4W22E14F | FROSTED        | 250   | 4     | E14    |        |
| ZIK017/4W22E27F | FROSTED        | 250   | 4     | E27    |        |
| ZIK017/4W22E14G | GOLD MIRRORRED | 270   | 4     | E14    |        |
| ZIK017/4W22E27G | GOLD MIRRORRED | 270   | 4     | E27    |        |



## GOLFBALL G45 2700K

DIMMABLE: LEADING & TRAILING EDGE

|                    |           |
|--------------------|-----------|
| CRI                | 90        |
| LIFETIME HRS       | 30,000    |
| ON/ OFF CYCLES     | 100,000   |
| START TIME         | < 0.2 SEC |
| VOLTAGE            | 220V-240V |
| HZ                 | 50/60HZ   |
| IN RUSH PROTECTION | 3,000V    |
| BEAM ANGLE         | 360°      |
| DIMENSIONS         | 75 X45MM  |



| MODEL           | GLASS FINISH     | LUMEN | WATTS | SOCKET | ENERGY |
|-----------------|------------------|-------|-------|--------|--------|
| ZIK017/4W27B22C | CLEAR            | 400   | 4     | B22    |        |
| ZIK017/4W27E14C | CLEAR            | 400   | 4     | E14    |        |
| ZIK017/4W27E27C | CLEAR            | 400   | 4     | E27    |        |
| ZIK017/4W27E14F | FROSTED          | 360   | 4     | E14    |        |
| ZIK017/4W27E27F | FROSTED          | 360   | 4     | E27    |        |
| ZIK017/4W27E14P | PORCELAIN        | 300   | 4     | E14    |        |
| ZIK017/4W27E27P | PORCELAIN        | 300   | 4     | E27    |        |
| ZIK017/4W27E14S | SILVER MIRRORRED | 375   | 4     | E14    |        |
| ZIK017/4W27E27S | SILVER MIRRORRED | 375   | 4     | E27    |        |



## GLS A60

*Decorative, ultra-dimmable LED filament lamp in GLS shape, fitted with top, industry-rated flicker-free technology and 3 years warranty. This lamp comes in a choice of 3 temperatures as well as a dim to warm option.*

### GLS A60 2000K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 95         |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 110 X 60MM |



| MODEL           | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|-----------------|--------------|-------|-------|--------|--------|
| ZIK031/4W22E27A | AMBER        | 300   | 4     | E27    |        |
| ZIK031/6W22B22A | AMBER        | 400   | 6     | B22    |        |
| ZIK031/6W22E27A | AMBER        | 400   | 6     | E27    |        |



### GLS A60 2200K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 95         |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 110 X 60MM |



| MODEL           | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|-----------------|--------------|-------|-------|--------|--------|
| ZIK031/6W22B22C | CLEAR        | 410   | 6     | B22    |        |
| ZIK031/6W22E27C | CLEAR        | 410   | 6     | E27    |        |
| ZIK031/6W22B22F | FROSTED      | 330   | 6     | B22    |        |
| ZIK031/6W22E27F | FROSTED      | 330   | 6     | E27    |        |
| ZIK031/6W22E27G | GOLD MIRROR  | 410   | 6     | E27    |        |





## GLS A60 2700K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 90         |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 110 X 60MM |



*Aquila*  
BY DESIGN

| MODEL           | GLASS FINISH     | LUMEN | WATTS | SOCKET | ENERGY |
|-----------------|------------------|-------|-------|--------|--------|
| ZIK031/2W27E27C | CLEAR            | 180   | 2     | E27    |        |
| ZIK031/6W27B22C | CLEAR            | 650   | 6     | B22    |        |
| ZIK031/6W27E27C | CLEAR            | 650   | 6     | E27    |        |
| ZIK031/8W27E27C | CLEAR            | 800   | 8     | E27    |        |
| ZIK031/6W27E27F | FROSTED          | 510   | 6     | E27    |        |
| ZIK031/6W27E27P | PORCELAIN        | 500   | 6     | E27    |        |
| ZIK031/6W27E27S | SILVER MIRRORRED | 550   | 6     | E27    |        |

ZICO®  
LIGHTING  
WORLDWIDE  
GLS A60







## GLOBE G95 / G125

*Decorative, ultra-dimmable LED filament lamp in a large Globe shape. This lamp is fitted with top, industry-rated flicker-free technology and comes with 3 years warranty.*

### GLOBE G95 2000K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 95         |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 140 X 95MM |



| MODEL            | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|------------------|--------------|-------|-------|--------|--------|
| ZIKD048/6W22E27A | AMBER        | 370   | 6     | E27    |        |

The oversized artistic shape of the Globe, paired with the glowing light of the filaments, makes a stunning feature and is ideally suited for light fittings designed to show the lightbulb.



## GLOBE G95 2200K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 95         |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 140 X 95MM |



| MODEL            | GLASS FINISH   | LUMEN | WATTS | SOCKET | ENERGY |
|------------------|----------------|-------|-------|--------|--------|
| ZIKD048/6W22E27G | GOLD MIRRORRED | 410   | 6     | E27    |        |

## GLOBE G95 2700K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 90         |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 140 X 95MM |



| MODEL            | GLASS FINISH     | LUMEN | WATTS | SOCKET | ENERGY |
|------------------|------------------|-------|-------|--------|--------|
| ZIKD048/6W27E27P | PORCELAIN        | 440   | 6     | 27     |        |
| ZIKD048/6W27E27S | SILVER MIRRORRED | 550   | 6     | 27     |        |



14 HILLS BAR & RESTAURANT, LONDON

## GLOBE G125 2000K

DIMMABLE: LEADING & TRAILING EDGE

|                    |             |
|--------------------|-------------|
| CRI                | 95          |
| LIFETIME HRS       | 30,000      |
| ON/ OFF CYCLES     | 100,000     |
| START TIME         | < 0.2 SEC   |
| VOLTAGE            | 220V-240V   |
| HZ                 | 50/60HZ     |
| IN RUSH PROTECTION | 3,000V      |
| BEAM ANGLE         | 360°        |
| DIMENSIONS         | 175 X 125MM |



| MODEL            | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|------------------|--------------|-------|-------|--------|--------|
| ZIKD052/6W22E27A | AMBER        | 370   | 6     | E27    |        |





THE IVY, LONDON

## RADIO T45

*Decorative, ultra-dimmable LED filament lamp in a Radio shape, fitted with top, industry-rated flicker-free technology and 3 years warranty. This lamp comes in amber glass finish and temperature of 2000K.*

### RADIO T45 2000K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 95         |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 110 X 45MM |



Aquila  
LIGHTING

| MODEL              | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|--------------------|--------------|-------|-------|--------|--------|
| ZIKD059/4.5W22E27A | AMBER        | 260   | 4.5   | E27    |        |



## SQUIRREL CAGE ST64

*Decorative, ultra-dimmable LED filament lamp in a Squirrel Cage shape, fitted with top, industry-rated flicker-free technology and 3 years warranty. This lamp comes in a choice of 2 temperatures and 2 glass finish options.*

### SQUIRREL CAGE ST64 2000K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 95         |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 140 X 64MM |




| MODEL            | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|------------------|--------------|-------|-------|--------|--------|
| ZIKD044/2W22E27A | AMBER        | 120   | 2     | E27    |        |
| ZIKD044/4W22E27A | AMBER        | 300   | 4     | E27    |        |
| ZIKD044/6W22B22A | AMBER        | 450   | 6     | B22    |        |
| ZIKD044/6W22E27A | AMBER        | 450   | 6     | E27    |        |

Zico Amber finish 2000K lamps are perfect for ambient lighting to create warm, relaxed interiors, ideally suited for evening dining. For spaces requiring cooler, more alert lighting, opt for Clear finish 2700K lamp.

### SQUIRREL CAGE ST64 2700K

DIMMABLE: LEADING & TRAILING EDGE

|                    |            |
|--------------------|------------|
| CRI                | 90         |
| LIFETIME HRS       | 30,000     |
| ON/ OFF CYCLES     | 100,000    |
| START TIME         | < 0.2 SEC  |
| VOLTAGE            | 220V-240V  |
| HZ                 | 50/60HZ    |
| IN RUSH PROTECTION | 3,000V     |
| BEAM ANGLE         | 360°       |
| DIMENSIONS         | 140 X 64MM |

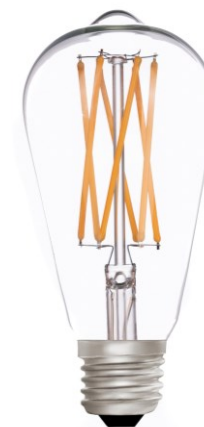

| MODEL            | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|------------------|--------------|-------|-------|--------|--------|
| ZIKD044/6W27E27C | CLEAR        | 600   | 6     | E27    |        |



MAYFAIR KITCHEN, LONDON



## PIGMY ST26

BAUR'S BRASSERIE & BAR, ZURICH

### PIGMY ST26 2000K

DIMMABLE: LEADING & TRAILING EDGE

|                    |           |
|--------------------|-----------|
| CRI                | 95        |
| LIFETIME HRS       | 30,000    |
| ON/ OFF CYCLES     | 100,000   |
| START TIME         | < 0.2 SEC |
| VOLTAGE            | 220V-240V |
| HZ                 | 50/60HZ   |
| IN RUSH PROTECTION | 3,000V    |
| BEAM ANGLE         | 360°      |
| DIMENSIONS         | 58 X 26MM |



| MODEL           | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|-----------------|--------------|-------|-------|--------|--------|
| ZIK071/1W22E14A | AMBER        | 60    | 1     | E14    |        |

### PIGMY ST26 2200K

DIMMABLE: LEADING & TRAILING EDGE

|                    |           |
|--------------------|-----------|
| CRI                | 95        |
| LIFETIME HRS       | 30,000    |
| ON/ OFF CYCLES     | 100,000   |
| START TIME         | < 0.2 SEC |
| VOLTAGE            | 220V-240V |
| HZ                 | 50/60HZ   |
| IN RUSH PROTECTION | 3,000V    |
| BEAM ANGLE         | 360°      |
| DIMENSIONS         | 58 X 26MM |



| MODEL           | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|-----------------|--------------|-------|-------|--------|--------|
| ZIK071/1W22B15C | CLEAR        | 70    | 1     | B15    |        |
| ZIK071/1W22E14C | CLEAR        | 70    | 1     | E14    |        |

### PIGMY ST26 2700K

DIMMABLE: LEADING & TRAILING EDGE

|                    |           |
|--------------------|-----------|
| CRI                | 90        |
| LIFETIME HRS       | 30,000    |
| ON/ OFF CYCLES     | 100,000   |
| START TIME         | < 0.2 SEC |
| VOLTAGE            | 220V-240V |
| HZ                 | 50/60HZ   |
| IN RUSH PROTECTION | 3,000V    |
| BEAM ANGLE         | 360°      |
| DIMENSIONS         | 58 X 26MM |



| MODEL           | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|-----------------|--------------|-------|-------|--------|--------|
| ZIK071/1W27B15C | CLEAR        | 90    | 1     | B15    |        |
| ZIK071/1W27E14C | CLEAR        | 90    | 1     | E14    |        |



## TUBE T20 / T30


Decorative, ultra-dimmable LED filament lamp, fitted with top, industry-rated flicker-free technology and 3 years warranty. This lamp comes in T20 or T30 with 3 size options.



### TUBE T20 / T30 2000K

DIMMABLE: LEADING & TRAILING EDGE

|                    |                                |
|--------------------|--------------------------------|
| CRI                | 95                             |
| GLASS FINISH       | AMBER                          |
| LIFETIME HRS       | 30,000                         |
| ON/ OFF CYCLES     | 100,000                        |
| START TIME         | < 0.2 SEC                      |
| VOLTAGE            | 220V-240V                      |
| HZ                 | 50/60HZ                        |
| IN RUSH PROTECTION | 3,000V                         |
| BEAM ANGLE         | 360°                           |
| DIMENSIONS (MM)    | 115 X 20 / 185 x 30 / 300 x 30 |



| MODEL                  | LAMP SHAPE | LUMEN | WATTS | SOCKET | ENERGY |
|------------------------|------------|-------|-------|--------|--------|
| NEW ZIKD020/2.7W22E14A | T20 115MM  | 150   | 2.7   | E14    | G A G  |
| ZIKD062/6W22E27A       | T30 185MM  | 400   | 6     | E27    | G A G  |
| ZIKD067/6W22E27A       | T30 300MM  | 370   | 6     | E27    | G A G  |

### TUBE T30 2200K

DIMMABLE: LEADING & TRAILING EDGE

|                    |             |
|--------------------|-------------|
| CRI                | 95          |
| GLASS FINISH       | CLEAR       |
| LIFETIME HRS       | 30,000      |
| ON/ OFF CYCLES     | 100,000     |
| START TIME         | < 0.2 SEC   |
| VOLTAGE            | 220V-240V   |
| HZ                 | 50/60HZ     |
| IN RUSH PROTECTION | 3,000V      |
| BEAM ANGLE         | 360°        |
| DIMENSIONS         | 185 x 30 MM |

| MODEL            | LAMP SHAPE | LUMEN | WATTS | SOCKET | ENERGY |
|------------------|------------|-------|-------|--------|--------|
| ZIKD062/6W22E27C | T30 185MM  | 450   | 6     | E27    | G A G  |



### TUBE T30 2700K

DIMMABLE: LEADING & TRAILING EDGE

|                    |                     |
|--------------------|---------------------|
| CRI                | 90                  |
| GLASS FINISH       | CLEAR               |
| LIFETIME HRS       | 30,000              |
| ON/ OFF CYCLES     | 100,000             |
| START TIME         | < 0.2 SEC           |
| VOLTAGE            | 220V-240V           |
| HZ                 | 50/60HZ             |
| IN RUSH PROTECTION | 3,000V              |
| BEAM ANGLE         | 360°                |
| DIMENSIONS (MM)    | 185 x 30 / 300 X 30 |

| MODEL                | LAMP SHAPE | LUMEN | WATTS | SOCKET | ENERGY |
|----------------------|------------|-------|-------|--------|--------|
| NEW ZIKD062/6W27E27C | T30 185MM  | 520   | 6     | E27    | G A G  |
| NEW ZIKD067/6W27E27C | T30 300MM  | 525   | 6     | E27    | G A G  |





G9

THE GROVE, WATFORD

## G9 2200K

DIMMABLE: LEADING & TRAILING EDGE

|                    |             |
|--------------------|-------------|
| CRI                | 95          |
| LIFETIME HRS       | 30,000      |
| ON/ OFF CYCLES     | 100,000     |
| START TIME         | < 0.2 SEC   |
| VOLTAGE            | 220V-240V   |
| HZ                 | 50/60HZ     |
| IN RUSH PROTECTION | 3,000V      |
| BEAM ANGLE         | 360°        |
| DIMENSIONS         | 70 X 17.8MM |



|     | MODEL           | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|-----|-----------------|--------------|-------|-------|--------|--------|
| NEW | ZIK070S/3W22G9C | CLEAR        | 200   | 3     | G9     |        |
|     | ZIK070S/3W22G9F | FROSTED      | 165   | 3     | G9     |        |

## G9 2000K

DIMMABLE: LEADING & TRAILING EDGE

|                    |             |
|--------------------|-------------|
| CRI                | 95          |
| LIFETIME HRS       | 30,000      |
| ON/ OFF CYCLES     | 100,000     |
| START TIME         | < 0.2 SEC   |
| VOLTAGE            | 220V-240V   |
| HZ                 | 50/60HZ     |
| IN RUSH PROTECTION | 3,000V      |
| BEAM ANGLE         | 360°        |
| DIMENSIONS         | 70 X 17.8MM |



|  | MODEL           | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|--|-----------------|--------------|-------|-------|--------|--------|
|  | ZIK070S/3W22G9A | AMBER        | 200   | 3     | G9     |        |

## G9 2700K

DIMMABLE: LEADING & TRAILING EDGE

|                    |             |
|--------------------|-------------|
| CRI                | 90          |
| LIFETIME HRS       | 30,000      |
| ON/ OFF CYCLES     | 100,000     |
| START TIME         | < 0.2 SEC   |
| VOLTAGE            | 220V-240V   |
| HZ                 | 50/60HZ     |
| IN RUSH PROTECTION | 3,000V      |
| BEAM ANGLE         | 360°        |
| DIMENSIONS         | 70 X 17.8MM |



|     | MODEL           | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|-----|-----------------|--------------|-------|-------|--------|--------|
| NEW | ZIK070S/3W27G9C | CLEAR        | 250   | 3     | G9     |        |
|     | ZIK070S/3W27G9F | FROSTED      | 220   | 3     | G9     |        |



## CAPSULE G4

*Decorative, ultra-dimmable LED filament lamp in a G4 shape, fitted with top, industry-rated flicker-free technology and 3 years warranty. This lamp dims best, when connected to Zico Lighting transformer.*

### CAPSULE G4 2700K

DIMMABLE:  
YES, WITH ZICO CONSTANT VOLTAGE DRIVER

|                    |             |
|--------------------|-------------|
| CRI                | 90          |
| LIFETIME HRS       | 30,000      |
| ON/ OFF CYCLES     | 100,000     |
| START TIME         | < 0.2 SEC   |
| VOLTAGE            | 220V-240V   |
| HZ                 | 50/60HZ     |
| IN RUSH PROTECTION | 3,000V      |
| BEAM ANGLE         | 360°        |
| DIMENSIONS         | 10 X 37.5MM |



| MODEL                | GLASS FINISH | LUMEN | WATTS | SOCKET | ENERGY |
|----------------------|--------------|-------|-------|--------|--------|
| ZIHP/1.6W27G4GOB-12V | CLEAR        | 160   | 1.6   | G4     |        |

\* Dimming range depends on the quality of the dimmer. Minimum load 2 x G4 Lamps.

## TRIAC CONSTANT VOLTAGE DIMMABLE DRIVER

Designed especially for powering LED lights this Triac dimmable LED driver is perfect for use with smaller lamps, such as Zico Lighting G4 Capsule and comes with 5 years warranty.

DIMMABLE: LEADING & TRAILING EDGE

|                 |                 |
|-----------------|-----------------|
| INPUT VOLTAGE   | 180 - 240V/AC   |
| INPUT CURRENT   | 0.12A max       |
| AC FREQUENCY    | 50 / 60HZ       |
| OUTPUT CURRENT  | 1500mA          |
| OUTPUT POWER    | 20W             |
| ON LOAD VOLTAGE | 12V             |
| LIFETIME        | 50,000H         |
| DIMENSIONS      | 100 X 36 X 18MM |



| MODEL           | WATTS | VOLTS | DIMMING  |
|-----------------|-------|-------|----------|
| ZIHTDRCV/12W12V | 20W   | 12V   | 5 - 100% |



## GU10 COLOUR BALANCE

Our Colour Balance line uses the latest technology to deliver high quality, balanced lighting, close to natural daylight. With CRI 95 and R9 ca.90, these spotlights aim to breach the gap between natural and artificial light, showcasing the true colours of the interior.

This ultra-dimmable LED spotlight, comes in a choice of 2 temperatures as well as a dim to warm option.

### GU10 2200K

DIMMABLE: LEADING & TRAILING EDGE

|                    |           |
|--------------------|-----------|
| CRI                | 95        |
| R9                 | ca.90     |
| LIFETIME           | 25,000H   |
| ON/ OFF CYCLES     | 100,000   |
| VOLTAGE            | 220V-240V |
| HZ                 | 50/60 HZ  |
| IN RUSH PROTECTION | 0.5KV     |
| DIMENSIONS         | 56 X 50MM |
| CASING             | BLACK     |



| MODEL           | BEAM ANGLE | LUMEN | WATTS | GLASS FINISH | ENERGY |
|-----------------|------------|-------|-------|--------------|--------|
| ZFXGU10/7W2210B | 10°        | 350   | 7     | CLEAR        |        |
| ZFXGU10/7W2224B | 24°        | 380   | 7     | CLEAR        |        |
| ZFXGU10/7W2236B | 36°        | 400   | 7     | CLEAR        |        |

\* Please note, these products are for indoor use only.

### GU10 2700K

DIMMABLE: LEADING & TRAILING EDGE

|                    |           |
|--------------------|-----------|
| CRI                | 95        |
| R9                 | ca.90     |
| LIFETIME           | 25,000H   |
| ON/ OFF CYCLES     | 100,000   |
| VOLTAGE            | 220V-240V |
| HZ                 | 50/60 HZ  |
| IN RUSH PROTECTION | 0.5KV     |
| DIMENSIONS         | 56 X 50MM |
| CASING             | BLACK     |



| MODEL           | BEAM ANGLE | LUMEN | WATTS | GLASS FINISH | ENERGY |
|-----------------|------------|-------|-------|--------------|--------|
| ZFXGU10/7W2710B | 10°        | 400   | 7     | CLEAR        |        |
| ZFXGU10/7W2724B | 24°        | 450   | 7     | CLEAR        |        |
| ZFXGU10/7W2736B | 36°        | 450   | 7     | CLEAR        |        |

### GU10 DIM TO WARM

DIMMABLE: LEADING & TRAILING EDGE

|                    |               |
|--------------------|---------------|
| CRI                | 95            |
| R9                 | ca.90         |
| TEMPERATURE        | 2000K - 3000K |
| LIFETIME           | 25,000H       |
| ON/ OFF CYCLES     | 100,000       |
| VOLTAGE            | 220V-240V     |
| HZ                 | 50/60 HZ      |
| IN RUSH PROTECTION | 0.5KV         |
| DIMENSIONS         | 56 X 50MM     |
| CASING             | BLACK         |




| MODEL           | BEAM ANGLE | LUMEN | WATTS | GLASS FINISH | ENERGY |
|-----------------|------------|-------|-------|--------------|--------|
| ZFXGU10/7WDW24B | 24°        | 380   | 7     | CLEAR        |        |
| ZFXGU10/7WDW36B | 36°        | 380   | 7     | CLEAR        |        |



## MULTI-WAY LED DIMMER MODULE

*Designed for switching and dimming dimmable LED lamps as well as incandescent lamps, HV halogen lamps and transformers with halogen lamps this multi-way LED dimmer module is great for mixed loads with multi-way control.*

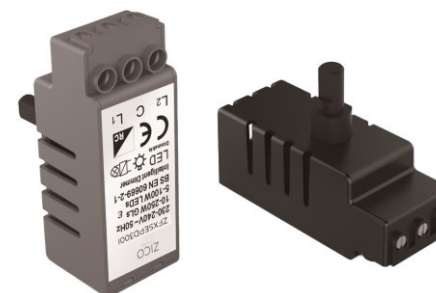

DIMMING METHOD: TRAILING & LEADING EDGE PHASE CONTROL

|                       |                                 |
|-----------------------|---------------------------------|
| AUTO-DETECT LOAD TYPE | YES                             |
| MULTI- WAYCONTROL     | YES                             |
| RATED VOLTAGE         | AC 220-240 V ~ , 50HZ           |
| CONNECTED LOAD        | 3VA - 300VA (1-15LEDS,MAX.250W) |
| CONNECTION            | SCREW TERMINAL                  |
| DIMENSIONS            | 63 X 26 X 22MM                  |

| MODEL       | WATTS | VOLTS | CURRENT |
|-------------|-------|-------|---------|
| ZFXSEPD300I | 12W   | 12V   | 1A      |



# FANTASTIC SOUND QUALITY IN ANY ROOM

---

**LITHEAUDIO**

MEET THE **NEW GENERATION OF SPEAKERS** AND ENJOY LISTENING TO MUSIC FROM YOUR DEVICE WITH THE EXCELLENT SOUND QUALITY.

**Lithe Audio Bluetooth Ceiling Speaker** is an all-in-one solution for playing music directly from your device – in homes, hotel rooms, coffee shops, hair salons and spas.

Just connect the power via your lighting circuit, or simply plug into a plug socket if you prefer, then pair your tablet, smartphone or Amazon Echo and you are ready to enjoy the quality sounds of your choice.

**Zico Lighting is an authorised global agent for Lithe Audio.**



- > AMPLIFIER & BLUETOOTH BUILT-IN, SO ALL YOU NEED IS POWER
- > WORKS WITH ANY BLUETOOTH ENABLED PHONE, TABLET OR COMPUTER
- > FULLY COMPATIBLE WITH AMAZON ECHO AND GOOGLE HOME DEVICES
- > FAST & EASY INSTALLATION; CONNECTS TO YOUR LIGHTING CIRCUIT OR SIMPLY PLUG IN
- > FULLY SYNCHRONIZED AUDIO AND VIDEO





## BLUETOOTH SPEAKERS

*Easy to install, the speaker offers fantastic sound quality – its small size and discreet appearance would blend in with any décor and work in the smallest of spaces.*



|                     |                                |
|---------------------|--------------------------------|
| INPUTS              | BLUETOOTH V4.0 OR ANALOG (RCA) |
| WORKS WITH          | ALL BLUETOOTH DEVICES          |
| WIRELESS RANGE      | UP TO 10M                      |
| SOUND QUALITY       | THD+N<0.009%, 65HZ-20KHZ       |
| SENSITIVITY (1W/1M) | 90DB                           |
| POWER SUPPLY INPUT  | 100-240V, 50-60HZ              |
| POWER SUPPLY OUTPUT | DC24V / 25A                    |
| DIMENSIONS          | 230 X 100MM                    |



**LITHEAUDIO**

| MODEL    | PRODUCT                                                | WATERPROOF |
|----------|--------------------------------------------------------|------------|
| ZRT03200 | BLUETOOTH CEILING SPEAKER (SINGLE - MASTER)            |            |
| ZRT03201 | BLUETOOTH CEILING SPEAKER (PAIR)                       |            |
| ZRT03210 | BLUETOOTH IP44 RATED CEILING SPEAKER (SINGLE - MASTER) | X          |
| ZRT03211 | BLUETOOTH IP44 RATED CEILING SPEAKER (PAIR)            | X          |
| ZRT03202 | BLUETOOTH CEILING SPEAKER (2 MASTER AND 2 PASSIVES)    |            |
| ZRT03203 | BLUETOOTH CEILING SPEAKER (3 MASTER AND 3 PASSIVES)    |            |



### DIM-TO-WARM RANGE

|                       |   |
|-----------------------|---|
| CANDLE PORCELAIN 4W   | 8 |
| GOLFBALL PORCELAIN 4W | 8 |
| GLS PORCELAIN 6W      | 8 |
| GLOBE PORCELAIN 6W    | 8 |

### HELIX RANGE

|                   |    |
|-------------------|----|
| CANDLE AMBER 2W   | 10 |
| GOLFBALL AMBER 2W | 11 |
| GLS AMBER 4W      | 11 |
| GLOBE AMBER 4W    | 11 |
| SQUIRREL CAGE 4W  | 11 |

### CANDLE C35

|                    |    |
|--------------------|----|
| AMBER 4W 2000K     | 12 |
| CLEAR 4W 2200K     | 12 |
| CLEAR 4W 2700K     | 13 |
| CLEAR 6W 2200K     | 12 |
| CLEAR 6W 2700K     | 13 |
| FROSTED 2W 2700K   | 13 |
| FROSTED 4W 2200K   | 12 |
| FROSTED 4W 2700K   | 13 |
| PORCELAIN 4W 2700K | 13 |

### FRENCH CANDLE C22

|                |    |
|----------------|----|
| CLEAR 2W 2200K | 14 |
| CLEAR 2W 2700K | 14 |

### FLAME TIP CANDLE C35

|                |    |
|----------------|----|
| CLEAR 4W 2200K | 15 |
| CLEAR 4W 2700K | 15 |
| CLEAR 6W 2200K | 15 |
| CLEAR 6W 2700K | 15 |

### GOLFBALL G45

|                          |    |
|--------------------------|----|
| AMBER 4W 2000K           | 16 |
| CLEAR 4W 2200K           | 17 |
| CLEAR 4W 2700K           | 17 |
| FROSTED 4W 2200K         | 17 |
| FROSTED 4W 2700K         | 17 |
| PORCELAIN 4W 2700K       | 17 |
| GOLD MIRRORED 4W 2200K   | 17 |
| SILVER MIRRORED 4W 2700K | 17 |

### GLS A60

|                          |    |
|--------------------------|----|
| AMBER 6W 2000K           | 18 |
| CLEAR 2W 2700K           | 19 |
| CLEAR 6W 2200K           | 18 |
| CLEAR 6W 2700K           | 19 |
| CLEAR 8W 2700K           | 19 |
| FROSTED 6W 2200K         | 18 |
| FROSTED 6W 2700K         | 19 |
| PORCELAIN 6W 2700K       | 19 |
| GOLD MIRRORED 6W 2200K   | 18 |
| SILVER MIRRORED 6W 2700K | 19 |

### GLOBE G95

|                          |    |
|--------------------------|----|
| AMBER 6W 2000K           | 20 |
| PORCELAIN 6W 2700K       | 21 |
| GOLD MIRRORED 6W 2200K   | 21 |
| SILVER MIRRORED 6W 2700K | 21 |

### GLOBE G125

|                |    |
|----------------|----|
| AMBER 6W 2000K | 21 |
|----------------|----|

### RADIO T45

|                    |    |
|--------------------|----|
| ZIKD059/4.5W22E27A | 22 |
|--------------------|----|

### SQUIRREL CAGE ST64

|                |    |
|----------------|----|
| AMBER 2W 2000k | 23 |
| AMBER 4W 2000K | 23 |
| AMBER 6W 2000K | 23 |
| CLEAR 6W 2700K | 23 |

### PIGMY ST26

|                |    |
|----------------|----|
| AMBER 1W 2000K | 24 |
| CLEAR 1W 2200K | 24 |
| CLEAR 1W 2700K | 24 |

### TUBE T20

|                  |    |
|------------------|----|
| AMBER 2.7W 2000K | 25 |
|------------------|----|

### TUBE T30 185mm

|                |    |
|----------------|----|
| AMBER 6W 2000K | 25 |
| CLEAR 6W 2200K | 25 |
| CLEAR 6W 2700K | 25 |

### TUBE T30 300mm

|                |    |
|----------------|----|
| AMBER 6W 2000K | 25 |
| CLEAR 6W 2700K | 25 |

### G9

|                  |    |
|------------------|----|
| AMBER 3W 2000K   | 26 |
| CLEAR 3W 2200K   | 26 |
| CLEAR 3W 2700K   | 26 |
| FROSTED 3W 2200K | 26 |
| FROSTED 3W 2700K | 26 |

### CAPSULE G4

|                  |    |
|------------------|----|
| CLEAR 1.6W 2700K | 27 |
|------------------|----|

### GU10

|                 |    |
|-----------------|----|
| 2200K 10°       | 28 |
| 2200K 24°       | 28 |
| 2200K 36°       | 28 |
| 2700K 10°       | 28 |
| 2700K 24°       | 28 |
| 2700K 36°       | 28 |
| DIM-TO-WARM 24° | 28 |
| DIM-TO-WARM 36° | 28 |



# CONTACT ZICO LIGHTING

## HEAD OFFICE

ZICO LIGHTING  
3rd Floor  
207 Regent Street  
London  
W1B 3HH  
United Kingdom  
+44 (0) 207 223 3087  
[admin@zico.lighting](mailto:admin@zico.lighting)

## EU

C/o Zico Lighting  
ETA Logistics GMBH  
Lilienthalstrasse 19  
Munich Airport  
Hallbergmoos,  
85399 Germany  
+49 69 222224630  
[admin@zico.lighting](mailto:admin@zico.lighting)

## DISTRIBUTORS

### AUSTRALIA

Eltad Pty Ltd  
Unit 7, Slough Business Park  
Rachael Close  
Silverwater 2128  
Australia  
+61 1300 393 311  
[sales@eltad.com.au](mailto:sales@eltad.com.au)

Eltad Pty Ltd  
115 Miller St.  
Epping VIC 3076  
Australia  
+61 1300 393 311  
[sales@eltad.com.au](mailto:sales@eltad.com.au)

Eltad Pty  
Unit 3, 35 Guthrie Street  
Osborne Park WA 6017  
Australia  
+61 1300 393 311  
[sales@eltad.com.au](mailto:sales@eltad.com.au)

### NEW ZEALAND

Elpower NZ  
Unit 4 / 1 Hautu Drive  
Wiri, Manukau 2104  
New Zealand  
+64 9250 1110  
[sales@elpower.co.nz](mailto:sales@elpower.co.nz)

### THAILAND & PHUKET

Mosaic Eins, 43 Thai CC Tower  
15th Floor, Room 154  
South Sathon Rd,  
Yannawa, Sathon  
Bangkok 10120, Thailand  
+ 66 2 621 8200  
[service@mosaiceins.com](mailto:service@mosaiceins.com)



## RESELLERS

### ABU DHABI

HUDA Lighting – Abu Dhabi Bayt Al  
Al Tawreed Trading LLC Airport Rd  
Al Niyadi Bldg Office No 901  
P.O. Box 75944, Abu Dhabi UAE  
+971 2449 8198  
[info@hudalighting.com](mailto:info@hudalighting.com)

### AZERBAIJAN

PASHA CONSTRUCTION  
Port Baku Towers  
153 Neftchiler Ave  
AZ1010, Baku  
Azerbaijan  
+994 12 404 4800  
[RYagubov@pashaconstruction.com](mailto:RYagubov@pashaconstruction.com)

### BAHRAIN

Stockline General Trading W.L.L.  
Office no 13, Building 706V,  
Road no. 1212,  
Hamala 1012,  
Kingdom of Bahrain  
+973 66907062  
[sales@stocklinebah.com](mailto:sales@stocklinebah.com)

### CHINA

Circle Limited  
Flat 4, 1/F Fullagar Ind Bldg  
234 Aberdeen Main Rd  
Aberdeen  
HONG KONG  
+852 2870 8106  
[info@circle-oo.com](mailto:info@circle-oo.com)

### DOHA

HUDA Lighting Specialized  
Products Suppliers LLC  
a1st Floor, Office No. 2  
PO Box 22108, Doha, Qatar  
+974 4442 6757  
[yeghya@hudalighting.com](mailto:yeghya@hudalighting.com)

### DUBAI

HUDA Lighting – Dubai Bayt Al  
Tawreed Trading LLC Umm Suqeim  
Rd Al Quoz PO Box 212060  
Dubai UAE  
+971 4341 1301  
[yeghya@hudalighting.com](mailto:yeghya@hudalighting.com)

### EGYPT

El Huda Lighting  
12 Ext of Abd El-Hameed Badawi St –  
1172 2nd Floor  
Masaken Sheraton  
Next to Moror Dept Cairo  
+20 2226 99740  
[nabil@hudalighting.com](mailto:nabil@hudalighting.com)

### FRANCE

Incidence Eclairage  
65 Avenue du Général de Gaulle  
Champs sur Marne  
77420, FRANCE  
+33 1 6005 9005  
[l.noyelle@incidence-eclairage.fr](mailto:l.noyelle@incidence-eclairage.fr)

### GREECE

Aktor  
25, Ermou Str.  
14564 Nea Kifisia, Greece  
+30 210 818 5000  
[pgribabis@aktor.gr](mailto:pgribabis@aktor.gr)

### IRELAND

Britelux Lighting Ltd  
1st Floor, 63 Deerpark Road  
Mount Merrion  
Dublin A94 PN23  
Ireland  
+353 1 5653685  
[info@britelux.ie](mailto:info@britelux.ie)

### IRELAND

Lightsource  
The Engine Room,  
Portview Trade Centre  
310 Newtownards Road,  
Belfast, BT4 1HE  
+44(0)28 9066 6615  
[sales@thelightsource.co.uk](mailto:sales@thelightsource.co.uk)

### ITALY

Italiana Handmade  
Via F. Magellano 17 –  
35010  
Trebaseleghe (PD), Italy  
+39 049 796 1713  
[tecnico@italianahandmade.com](mailto:tecnico@italianahandmade.com)

### JORDAN

HUDA Lighting  
Building Technology Suppliers  
King Abdullah II Bin Al Hussein  
St Kalbouneh Center,  
1st Floor  
P.O. Box 3360  
Amman Jordan  
+962 6585 4660  
[suleiman@hudalighting.com](mailto:suleiman@hudalighting.com)

### KUWAIT

HUDA Lighting  
Khalid Ibn Al Waleed St  
Mazaya Tower, 4th Floor  
Office No B-1 Sharq  
Kuwait City, Kuwait  
+965 2206 0837  
[gader@hudalighting.com](mailto:gader@hudalighting.com)

### NETHERLANDS

XO Lights Europe  
Burgemeester Le Fevre de  
Montignyplein 8  
3055NL, Rotterdam,  
The Netherlands  
+31 613 740 383  
[info@xocompany.org](mailto:info@xocompany.org)

### NORWAY

CP-Norway AS, Fabrikkg. 3  
5059 Bergen – Norway  
Showrom-Projektkontor -Oslo  
Hovfaret 4b  
0275 Oslo – Norway  
+47 552 09700  
[arne.gronsdal@cp-norway.no](mailto:arne.gronsdal@cp-norway.no)

### PORTUGAL

VistaVerde  
Rua Domingos Sequeira 27  
4H  
1350-119 Lisboa  
PORTUGAL  
+351 9183 82761  
[comercial@vistaverde.pt](mailto:comercial@vistaverde.pt)

### SAUDI ARABIA

Horizon Moon International Est.  
P.O. Box – 69012  
Dammam – 31547  
Kingdom of Saudi Arabia  
+966 5335 95822  
+966 5485 62699  
[sales@horizonmie.com](mailto:sales@horizonmie.com)

### SPAIN

Difusiona  
Cervantes nº 10  
2º Derecha  
28014 Madrid, Spain  
+34 91 2307839  
[ajanin@difusiona.eu](mailto:ajanin@difusiona.eu)

Difusiona  
Provençals 94  
08019 Barcelona, Spain  
+34 93 362 22 79  
[ajanin@difusiona.eu](mailto:ajanin@difusiona.eu)

### SOUTH AFRICA

Light Kinetics (PTY) Ltd.  
Unit 8c, Dartfield Park  
Wynberg, Sandton  
Johannesburg, 2090  
South Africa  
+2711-728-1249  
[info@lightkinetics.com](mailto:info@lightkinetics.com)

### TURKEY

MTM Tur Kim. Ins. San. Tic. Ltd.  
KEMPINSKI ASTORIATOWER  
Büyükdere Cad. No:127/A79  
Esentepe, 34394, Sisli  
Istanbul, TURKEY  
+90 212 356 6560  
[info@mtmyapi.com](mailto:info@mtmyapi.com)

### VIETNAM

CARA Lighting Solution Co., Ltd.  
12-13 Duong N1, Khu TM Nam,  
KCX Tan Thuan, P. Tan Thuan Dong,  
Q.7, HCM City, Vietnam  
+84 (28) 3833 3334  
[lighting@cara.com.vn](mailto:lighting@cara.com.vn)

Eurolight Vietnam  
184 Hoang Quoc Viet  
Hanoi, Vietnam  
+84 24 3829 4478  
[tho.nguyen@eurolight.vn](mailto:tho.nguyen@eurolight.vn)